


**Peddinghaus**

**PeddiCat**

55 TON IRONWORKER



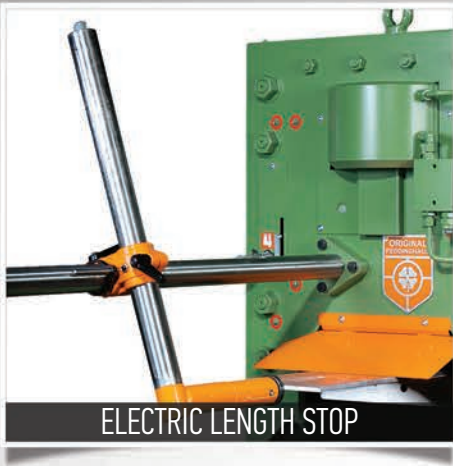

ELECTRIC LENGTH STOP



CORNER RADIUS TOOL



BENDING ATTACHMENT

Flat Bar Shear

Section Shear

Bar Stock Shear

Punch Unit

Notch Unit

Bending Attachment



### Machine Data

|                     |                 |
|---------------------|-----------------|
| Power Rating        | 5.5 HP          |
| Charge of Oil       | 12 gallons      |
| Net Weight with Oil | 1,810 lbs.      |
| Machine Dimensions  | 39" x 27" x 66" |

### Flat Bar Shear

|                     |            |
|---------------------|------------|
| Flat Bar Max        | 14" x 1/2" |
| Angle Iron, 45° Cut | 4" x 1/4"  |
| Blade Cut Length    | 14-1/2"    |
| Working Height      | 30-1/4"    |

### Section/Stock Shear

|                       |                |
|-----------------------|----------------|
| Cross Section         | 2-2/5"²        |
| Adjustable Stroke     | 3/8" - 1-3/8"  |
| Working Height        | 41-3/4"        |
| with Standard Blades: |                |
| Angle Iron, 90° Cut   | 4" x 1/4"      |
| Rounds                | 1-1/4" + 3/4"  |
| Squares               | 1-3/16" + 3/4" |

### Notch Unit

|                                  |             |
|----------------------------------|-------------|
| Bending Attachment               | 4" x 4"     |
| Working Height                   | 40-3/4"     |
| with Square Notching Attachment: |             |
| Flat Bar                         | 3/8"        |
| Angle                            | 2" x 3/8"   |
| Channels in Flange               | 3 - 5"      |
| I-beams in Flange                | 3 - 5"      |
| Width x Depth                    | 1-3/4" x 2" |

### Punch Unit

|                                     |                      |
|-------------------------------------|----------------------|
| Adjustable Stroke                   | 3/8" - 7/16"         |
| Number of Punch Strokes             | 21 min <sup>-1</sup> |
| Throat Depth                        | 8"                   |
| Working Height                      | 40-3/4"              |
| with Standard Punching Attachment:  |                      |
|                                     | Ø 1-1/4" in 1/2"     |
| with Oversized Punching Attachment: |                      |
| 2-1/4                               | Ø 2-1/4" in 1/4"     |
| 2-1/2                               | Ø 2-1/2" in 1/4"     |

**Peddinghaus**

[www.peddinghaus.com](http://www.peddinghaus.com)

Peddinghaus USA • (815) 937-3800 | Peddinghaus UK • +44 1952 200 377 | Peddinghaus Germany • +49 (0) 2332 72-0  
 Peddinghaus Latin America • +52 81-1001-7087 | Peddinghaus Española • +34 945 465370

PED120919